




## MA/CG (Vertical) FK-5-1-12 ENGINE ROOM WORKSHEET

Fireboy-Xintex will certify the volume of the engine room from manufacturer CAD drawing including volume calculations, or from a completed Engine Room Volume Worksheet

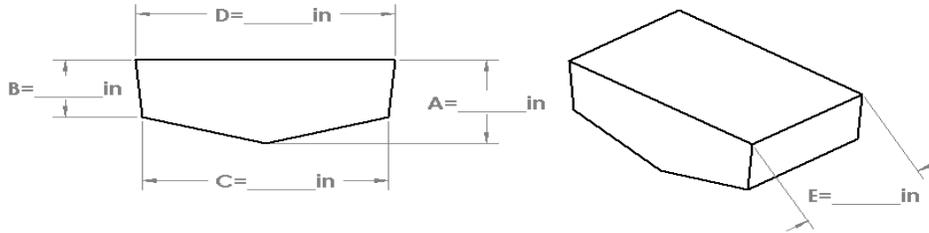

MAKE \_\_\_\_\_ MODEL \_\_\_\_\_ YEAR \_\_\_\_\_

MEASURED BY \_\_\_\_\_ Signature \_\_\_\_\_ Date \_\_\_\_\_  
 Print \_\_\_\_\_

### Gross Engine Room Volume

$$\frac{\text{A}}{\text{in}} + \frac{\text{B}}{\text{in}} = \text{in} \div 2 = \text{in} \times \frac{\text{C}}{\text{in}} = \text{in}^2$$

$$\frac{\text{D}}{\text{in}} - \frac{\text{C}}{\text{in}} = \text{in} \div 2 = \text{in} \times \frac{\text{B}}{\text{in}} = + \text{in}^2$$

MODEL REQUIRED: \_\_\_\_\_

$$\begin{aligned} &\downarrow \\ &\text{in}^2 \\ &\times \text{E} \\ &\downarrow \\ &\text{in}^3 \\ &+ \text{Additional Volume(s)} \\ &\downarrow \\ &\text{in}^3 \\ &\div 1728 \end{aligned}$$

MA Maximum Protected Volume = 1800 cu.ft.  
 CG Maximum Protected Volume = 1000 cu.ft.

$$\text{Gross Engine Room Volume} = \text{in}^3$$

Tank Description	Fixed Tank Deductions - Fuel - Water- Waste				
_____	_____ in	×	_____ in	×	_____ in = _____ in <sup>3</sup> ÷ 1728 = _____ ft <sup>3</sup>
	Length		Width		Depth
_____	_____ in	×	_____ in	×	_____ in = _____ in <sup>3</sup> ÷ 1728 = + _____ ft <sup>3</sup>
	Length		Width		Depth
_____	_____ in	×	_____ in	×	_____ in = _____ in <sup>3</sup> ÷ 1728 = + _____ ft <sup>3</sup>
	Length		Width		Depth
					Gross Tank Volume = _____ ft <sup>3</sup>

$$\text{Gross Engine Room Volume} - \text{Gross Tank Volume} = \text{Net Engine Room Volume}$$

$$\text{_____ ft}^3 - \text{_____ ft}^3 = \text{_____ ft}^3$$

USCG & ABYC ALLOWS DEDUCTIONS FOR FIXED TANKS BY BOAT MANUFACTURERS ONLY. NOTE: ENGINE VOLUME CANNOT BE DEDUCTED

## Engine Room Area

$$\frac{\text{_____ in}}{D} \times \frac{\text{_____ in}}{E} = \text{_____ in}^2 \div 144 = \text{_____ ft}^2$$

Models 025-1800 Maximum Approved Area: 352.7 ft<sup>2</sup>

## Engine Room Height

$$\frac{\text{_____ in}}{A} \div 12 = \text{_____ ft}$$


Models 025-1800 Approved Ceiling Height: 2.0 ft to 11.3 ft

## Discharge Nozzle Height

Distance from ceiling to discharge nozzle \_\_\_\_\_ in

Maximum Approved distance: 24 in

## Location of Cylinder

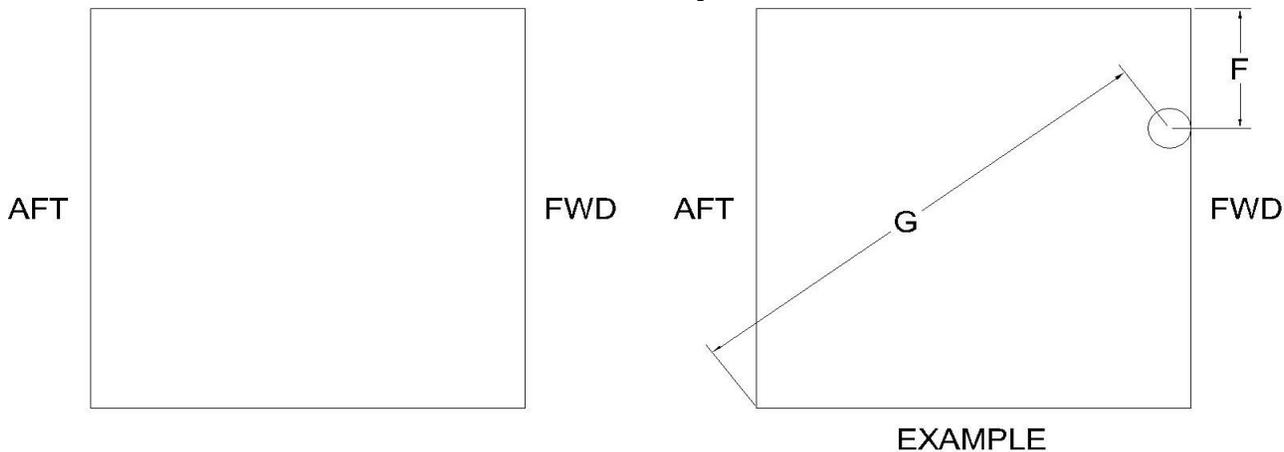

Indicate Cylinder Location in blank diagram above

F = Distance to nearest wall (Informational Only) \_\_\_\_\_ ft  
F

G = Distance to furthest corner (Maximum Radial Reach) \_\_\_\_\_ ft  
G

Models 025-1800 Maximum Approved Radial Reach (G): 21.0 ft